

Statistical Natural Language Processing

Tokenization, normalization, segmentation

Çağrı Çöltekin

University of Tübingen
Seminar für Sprachwissenschaft

Summer Semester 2020

Tokenization – a solved problem?


- Typically, we (in NLP/CL/IR/...) process text as a sequence of tokens
- Tokens are word-like units
- A related task is *sentence segmentation*
- Tokenization is a language dependent task, where it becomes more challenging in some languages
- Tokenization is often regarded as trivial, and a mostly solved task

Classical NLP pipeline

- *Tokenization*
Sentences, (normalized) words, stems / lemmas
- *Lexical / morphological processing*
POS tags, morphological features, stems / lemmas, named entities
- *Parsing*
Constituency / dependency trees
- *Semantic processing*
word-senses, logical forms
- *Discourse*
Co-reference resolution, discourse representation

We do not always use a pipeline, not all steps are necessary for all applications

Tokenization in the classical NLP pipeline



- Tokenization is the first in the pipeline
- Even for end-to-end approaches, tokenization is often considered given (needs to be done in advance)
- Errors propagate!

But, can't we just tokenize based on spaces?

...and get rid of the punctuation

Some examples from English:


- \$10 billion
- rock 'n' roll
- he's
- can't
- O'Reilly
- 5-year-old
- B-52
- C++
- C4.5
- 29.05.2017
- 134.2.129.121
- sfs.uni-tuebingen.de
- New York-based
- wake him up

Gets more interesting in other languages

- Chinese: 猫占领了婴儿床
'The cat occupied the crib'
- German: Lebensversicherungsgesellschaftsangestellter
'life insurance company employee'
- Turkish: İstanbullulaştırıramayabileceklerimizdenmişsiniz
'You were (evidentially) one of those who we may not be able to convert to an Istanbulite'
- Even more interesting when we need to process 'mixed' text with *code-switching*

Specialized and non-standard text

- More difficult for non-standard text
 - Many specialized terms use a mixture of letters, numbers, punctuation
 - Frequent misspelling, omitting space (e.g., after sentence final punctuation)
- Non-standard text can be
 - Spoken language
 - Old(er) samples of text (e.g., historical records)
 - Specialized domains, e.g., bio-medical texts
 - Informal communication, e.g., social media



Normalization

Normalization is a related task that often interacts with tokenization.

- For most applications (e.g., IR) we want to treat the following the same
 - Linguistics – linguistics
 - color – colour
 - lower case – lowercase – lower-case
 - Tübingen – Tuebingen – Tübingen
 - see – see
 - flm – film
 - Different date/time formats, phone numbers
- Most downstream tasks require the 'normalized' forms of the words

So, what is a token?

- One token or multiple?
 - John's
 - New York
 - German: *im* (*in + dem*)
 - Turkish: *İstanbullulaştırılamayabileceklerimizdenmişsiniz*
- Answer is language and application dependent
- Tokenization decisions are often arbitrary
- Consistency is important

Rule based tokenization

Regular expressions and finite-state automata

- The 'easy' solution to the tokenization is rule-based
- Using regular expressions,
 - we can define regular expressions for allowed tokens
 - split after match, disregard/discard the remaining parts
- For example,
 - All alphabetic characters, *word*, $[a-z]^+$
 - Capitalization, *John*, $[A-Z]?[a-z]^+$
 - Abbreviations, *Prof.*, $[A-Z]?[a-z]^+[.]?$
 - Numbers too, *123*, $[A-Z]?[a-z]^+[.]?[0-9]^+$
 - Numbers with decimal parts $[A-Z]?[a-z]^+[.]?[0-9.]^+$
 - ...
- Result is typically imprecise, difficult to maintain

Splitting sentences

- Another relevant task is *sentence tokenization*
- For most applications, we need sentence boundaries
- Sentence-final markers, $[. ! ?]$ are useful
- But the dot '.' is ambiguous: can either be end-of- sentence or abbreviation marker, or both
 - The U.N. is the largest intergovernmental organisation.
 - I had the impression he'll be ambassador to the U.N.
- Again, heuristics along with a list of abbreviations is possible

Problems with rule-based approaches

- Rule-based approaches are (still) common in practice, however
 - it is difficult to build a rule set that works well in practice
 - it is difficult to maintain
 - it is not domain or language general: needs re-implementation, re-adjustment for every case

Machine learning for word / sentence tokenization

- Another approach is to use machine learning
- Label each character in the text with
 - I inside a token
 - O outside tokens
 - B beginning of a token, alternatively to combine word/sentence tokenization
 - T beginning of a token
 - S beginning of a sentence
- How do we create the training data?
- What are the features for the ML?

I/O/B tokenization: an example

```
The U.N. is the largest intergovernmental
BIIIOBIIIOBIOBIIIOBIIIIIOBIIIIIIIIIIIIIIIO

organisation. I had the impression he'll
be
BIIIIIIIIIIIOOBIOBIIIOBIIIIIIIIIOBIBIIIOBIO

ambassador to the U.N.
BIIIIIIIIIIIOBIOBIIIOBIIIO
```

I/O/B tokenization example


with sentence boundary markers

```
The U.N. is the largest intergovernmental
SIIIOBIIIOBIIIOBIIIIIOBIIIIIIIIIIIIIIIO

organisation. I had the impression he'll
be
TIIIIIIIIIIIOOSOTIIIOBIIIOBIIIIIIIIIOBIIIOBIO

ambassador to the U.N.
TIIIIIIIIIIIOBIIIOBIIIOBIIIO
```

Features for tokenization



- We predict label of each character
- Typical features are the other characters around the target
- Choice of features and the machine learning method vary
- Using the previous prediction is also useful

Segmentation

- Segmentation is a related problem in many areas of computational linguistics
 - In some languages, the word boundaries are not marked
猫占领了婴儿床 → 猫 占领 了 婴儿床
 - We often want to split words into their morphemes
Lebensversicherungsgesellschaftsangestellter →
Leben+s+versicherung+s+gesellschaft+s+angestellter
 - In spoken language there are no reliable word boundaries

Supervised segmentation

- I/O/B tokenization is applicable to segmentation as well
- Often produces good accuracy
- The main drawback is the need for labeled data
- Some unsupervised methods with reasonable accuracy also exist
- In some cases, unsupervised methods are useful and favorable

A simple 'unsupervised' approach

- Using a lexicon, segment at maximum matching lexical item
 - Serves as a good baseline, but fails in examples like
theman
where maximum match suggests segmentation 'them an'
 - The out-of-vocabulary words are problematic
- One can use already known boundaries as signal for supervision
 - Known to work especially well for sentence segmentation, (e.g., using cues .?!)

Unsupervised segmentation

- Two main approaches
 - Learn a compact lexicon that maximizes the likelihood of the data

$$P(s) = \prod_{i=1}^n P(w_i)$$

$$P(w) = \begin{cases} (1-\alpha)f(w) & \text{if } w \text{ is known} \\ \alpha \prod_{i=1}^m P(\alpha_i) & \text{if } w \text{ is unknown} \end{cases}$$

- Segment at points where predictability (entropy) is low
The general idea: the predictability within words is high, predictability between words is low

Summary

- Tokenization is an important part of an NLP application
- Tokens are word-like units that are
 - linguistically meaningful
 - useful in NLP applications
- Tokenization is often treated as trivial, has many difficulties of its own
- White spaces help, but does not solve the tokenization problem completely
- Segmentation is tokenization of input where there are no boundary markers
- Solutions include rule-based (regex) or machine learning approaches

Next

Wed POS tagging / morphological processing

Some extra: modeling segmentation by children

NLP can be 'science', too

- An interesting application of unsupervised segmentation methods is modeling child language acquisition
- How children learn languages has been one of the central topics in linguistics and cognitive science
- Computational models allow us to
 - test hypotheses
 - create explicit models
 - make predictions


The puzzle to solve

```
ljuuzuibutsjhiuljuuz
ljuuztbzjubhbjompwfljuuz
xibutuibu
ljuuz
epzpvxbounpsfnjmlipofz
ljuuzljuuzephjhf
opnjxibuepftbljuuztbz
xibuepftbljuuztbz
ephjhfeph
ephjhf
opnjxibuepftuifephjftbz
xibuepftuifephjftbz
mjuumfbczcjsejf
bczcjsejf
zpvpeoumjlfiubupof
plbzpnanzubluijtpvu
dpx
uifdpxtbztnpppp
xibuepftuifdpxtbzopnj
```

- No clear boundary markers
- No lexical knowledge

How do children segment? – a bit of psycholinguistics

Children very early in life (8-months) seem to be sensitive to statistical regularities between syllables (Saffran, Aslin, and Newport 1996)

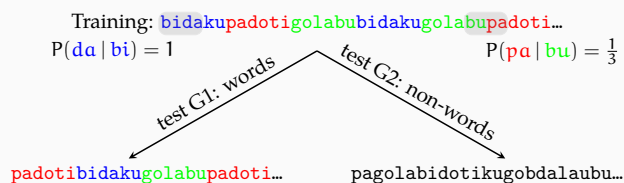

Children showed preference towards the 'words' that are used in the training phase.

Predictability

Predictability within units is high, predictability between units is low.

Given a sequence lr , where l and r are sequences of phonemes:

- If l help us predict r , lr is likely to be part of a word
- If observing r after l is surprising it is likely that there is a boundary between l and r

The strategy dates back to 1950s (Harris 1955), where he used a measure called *successor variety* (SV):

The morpheme boundaries are at the locations where there is a high variety of possible phonemes that follow the initial segment.

How to calculate the measures

#	I	z	D	&	t	6	k	I	t	i	#
P:	0.40	0.22	0.46	0.99	0.03	0.04	0.30	0.48	0.10		


$$P(6|t) = 0.03$$

Calculations are done on a corpus of child-directed English

An unsupervised method

- An obvious way to segment the sequence is using a threshold value. However, the choice of threshold is difficult in an unsupervised system.

A simple unsupervised method: segment at peaks/valleys.

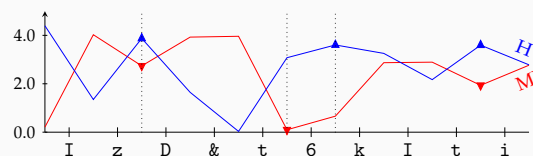

Segmentation puzzle: a solution

ljuuz uibut sjhiu ljuuz
ljuuz tbz ju bhhjo mpwf ljuuz
xibut uibu
ljuuz
ep zpv xbou npsf njml ipofz
ljuuz ljuuz ephhj
opnj xibu epft b ljuuz tbz
xibu epft b ljuuz tbz
ephhj eph
ephhj
opnj xibu epft uif ephhj tbz
xibu epft uif ephhj tbz
mjuumf cbcz cjsej
cbcz cjsej
zpv epou mjlf uibu pof
plbz npnznz ublf uijt pvu
dpx
uif dpx tbz npp npp
xibu epft uif dpx tbz opnj

ljuuz uibu tsjiuluuz
ljuuz tbz jubhjompwfljuuz
xibu tuibu
ljuuz
ep zpvxbounpsfnjml pof z
ljuuz ljuuz ephhj
opnj xibu ep ftb ljuuz tbz
xibu ep ftb ljuuz tbz
ephhj eph
ephhj
opnj xibu epft uif ephhj tbz
xibu ep ft uif ephhj tbz
mjuumfcbczcjsej
cbczcjsej
zpv epoumj lf uibu pof
plbznpnznzublfui jtpvu
dpx
uif dpx tbz tppnpp
xibu epft uif dpx tbz opnj

Segmentation puzzle: a solution

kitty thats right kitty
kitty say it again love kitty
whats that
kitty
do you want more milk honey
kitty kitty doggie
nomi what does a kitty say
what does a kitty say
doggie dog
doggie
nomi what does the doggie say
what does the doggie say
little baby birdie
baby birdie
you dont like that one
okay mommy take this out
cow
the cow says moo moo
what does the cow say nomi

kitty that srightkitty
kitty say itagainlovekitty
what shat
kitty
do youwantmoremilk one y
kitty kitty doggie
nomi what do esa kitty say
what do esa kitty say
doggie dog
doggie
nomi what does the doggie say
what do es the doggie say
littlebabybirdie
babybirdie
you dontli ke that one
okaymommytaketh isout
cow
the cow say smoomoo
what does the cow say nomi

Additional reading, references, credits

- Textbook reference: Jurafsky and Martin (2009, chapter 2 of the 3rd edition draft) sections 2.1–2.3 (inclusive)
- The Chinese word segmentation example is from Ma and Hinrichs (2015)
- Other segmentation examples are from Çöltekin (2011), where there is also a good amount of introductory information on segmentation

Additional reading, references, credits (cont.)

Çöltekin, Çağrı (2011). "Catching Words in a Stream of Speech: Computational simulations of segmenting transcribed child-directed speech". PhD thesis. University of Groningen. URL: <http://ira.ub.rug.nl/ppn/33913190X>.

Harris, Zellig S. (1955). "From Phoneme to Morpheme". In: *Language* 31.2, pp. 190–222. issn: 00978507. doi: 10.2307/411036.

Jurafsky, Daniel and James H. Martin (2009). *Speech and Language Processing: An Introduction to Natural Language Processing, Computational Linguistics, and Speech Recognition*. second. Pearson Prentice Hall. issn: 978-0-13-504196-3.

Ma, Jianqiang and Erhard Hinrichs (2015). "Accurate Linear-Time Chinese Word Segmentation via Embedding Matching". In: *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*. Beijing, China: Association for Computational Linguistics, pp. 1733–1743. URL: <http://www.aclweb.org/anthology/P15-1167>.

Saffran, Jenny R., Richard N. Aslin, and Elissa L. Newport (1996). "Statistical learning by 8-month old infants". In: *Science* 274.5294, pp. 1926–1928. doi: 10.1126/science.274.5294.1926.